


Prewire for Model 513, 909

Prewire for all "Pan", "TES2", "Vik", "Elan", VIO, etc.

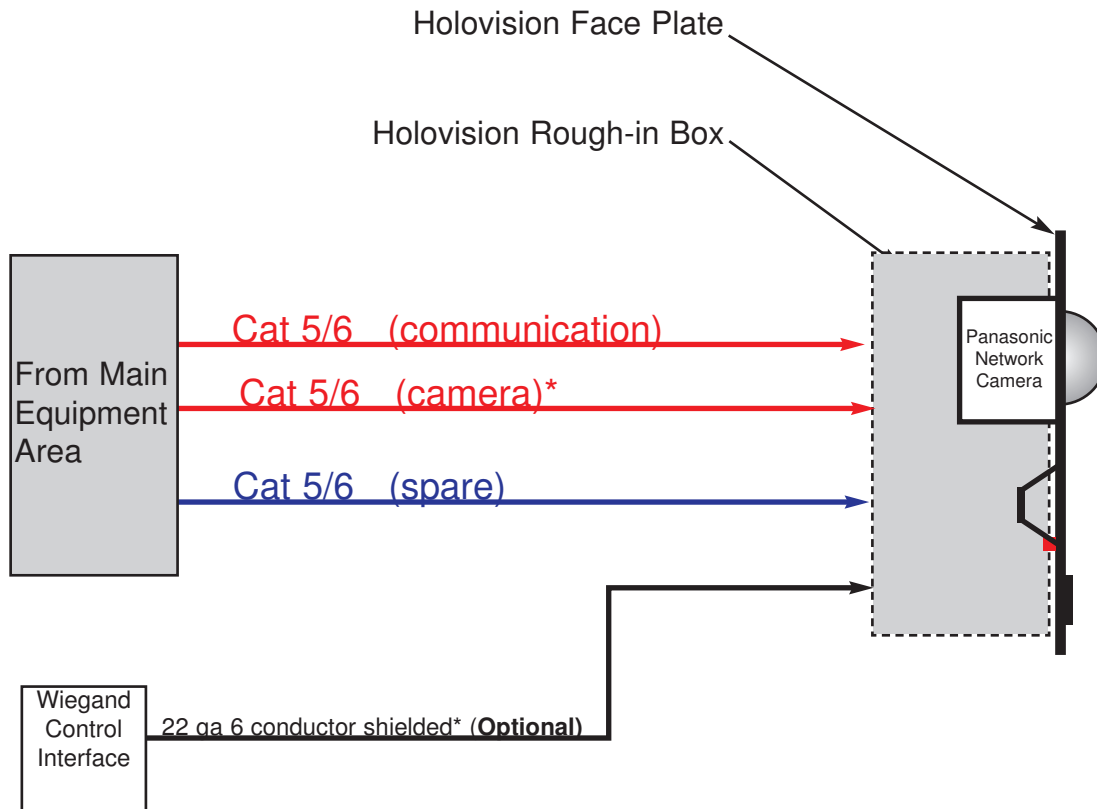

NOTE:

Wires shown in red are the minimum required

Wires shown in blue are recommended

Wiegand Prox Reader: (optional)

Cable Distance

Wiegand or Clock-and-Data interface: 500 feet

Recommended cable

Alpha 1295, Belden 5503FE 5 conductor, 22 AWG stranded with overall shield or equivalent

Door Station Rough-in

Model 513, 909



58"



NOTE: All dimensions given are relative to "finished" surface, not rough grade.