Prewire for Model 527

**MAIN EQUIP-
MENT AREA**

ekey
Control
Module

Cat 5/6 for biometric

Wiegand
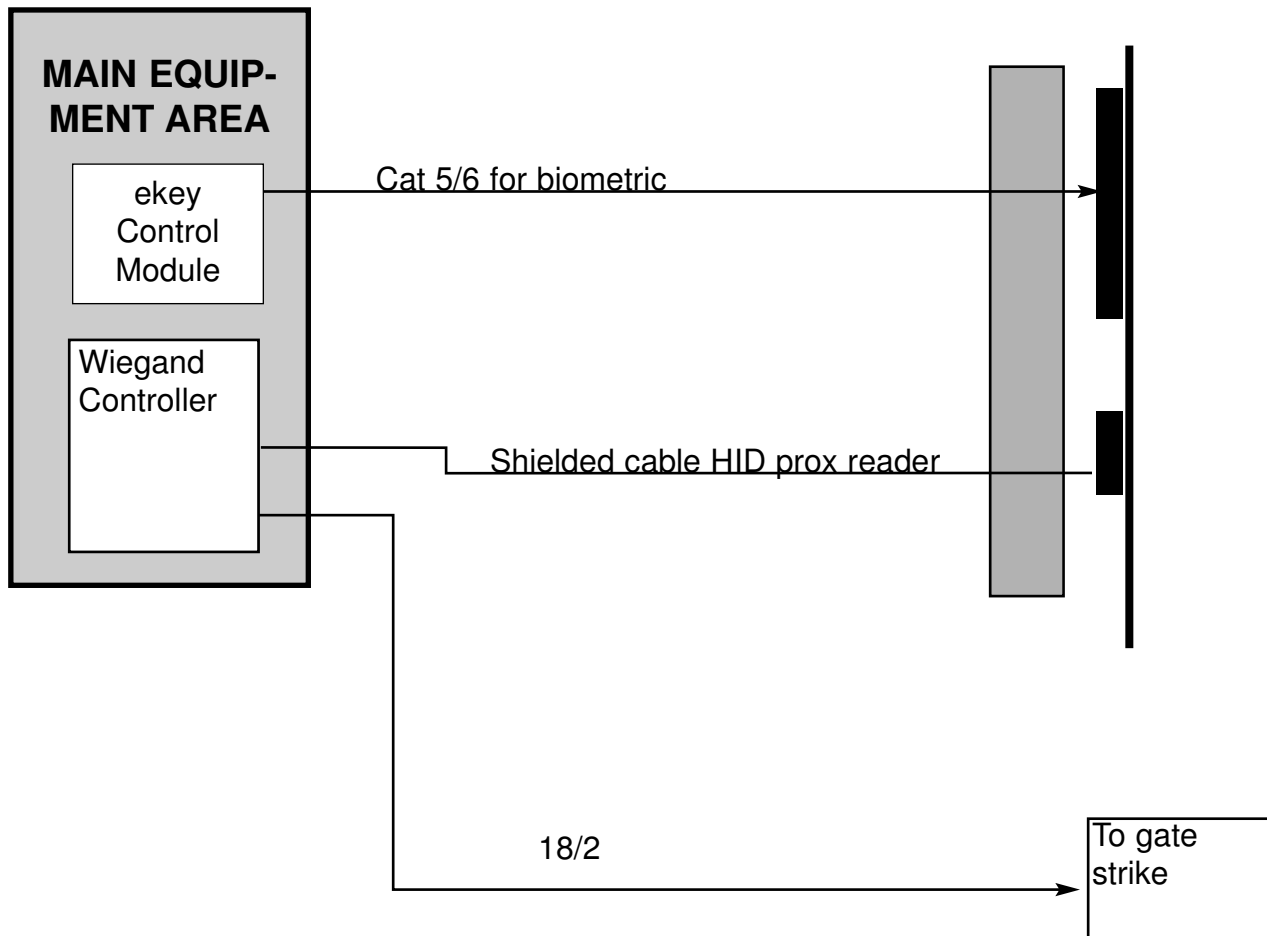Controller

Shielded cable HID prox reader

18/2

To gate
strike

Wiegand Keypads:
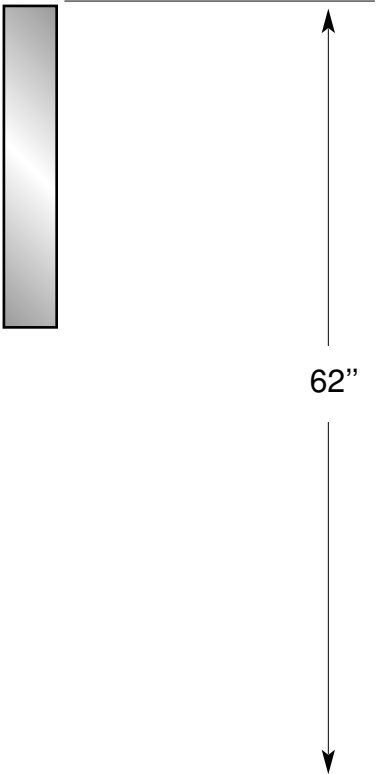
Cable Distance
Wiegand or Clock-and-Data interface: 500 feet
Recommended cable
Alpha 1295, Belden 5503FE 5 conductor, 22 AWG stranded with overall shield
or equivalent

     10.3 Access only

Rough-in

Model 527

62"

NOTE: All dimensions given are relative to "finished" surface, not rough grade.

   10.3 Access only