



# Prewire for Models 602 and 702

For the following units: 602-S12-CR/VIK and 702-S12-CR/VIK

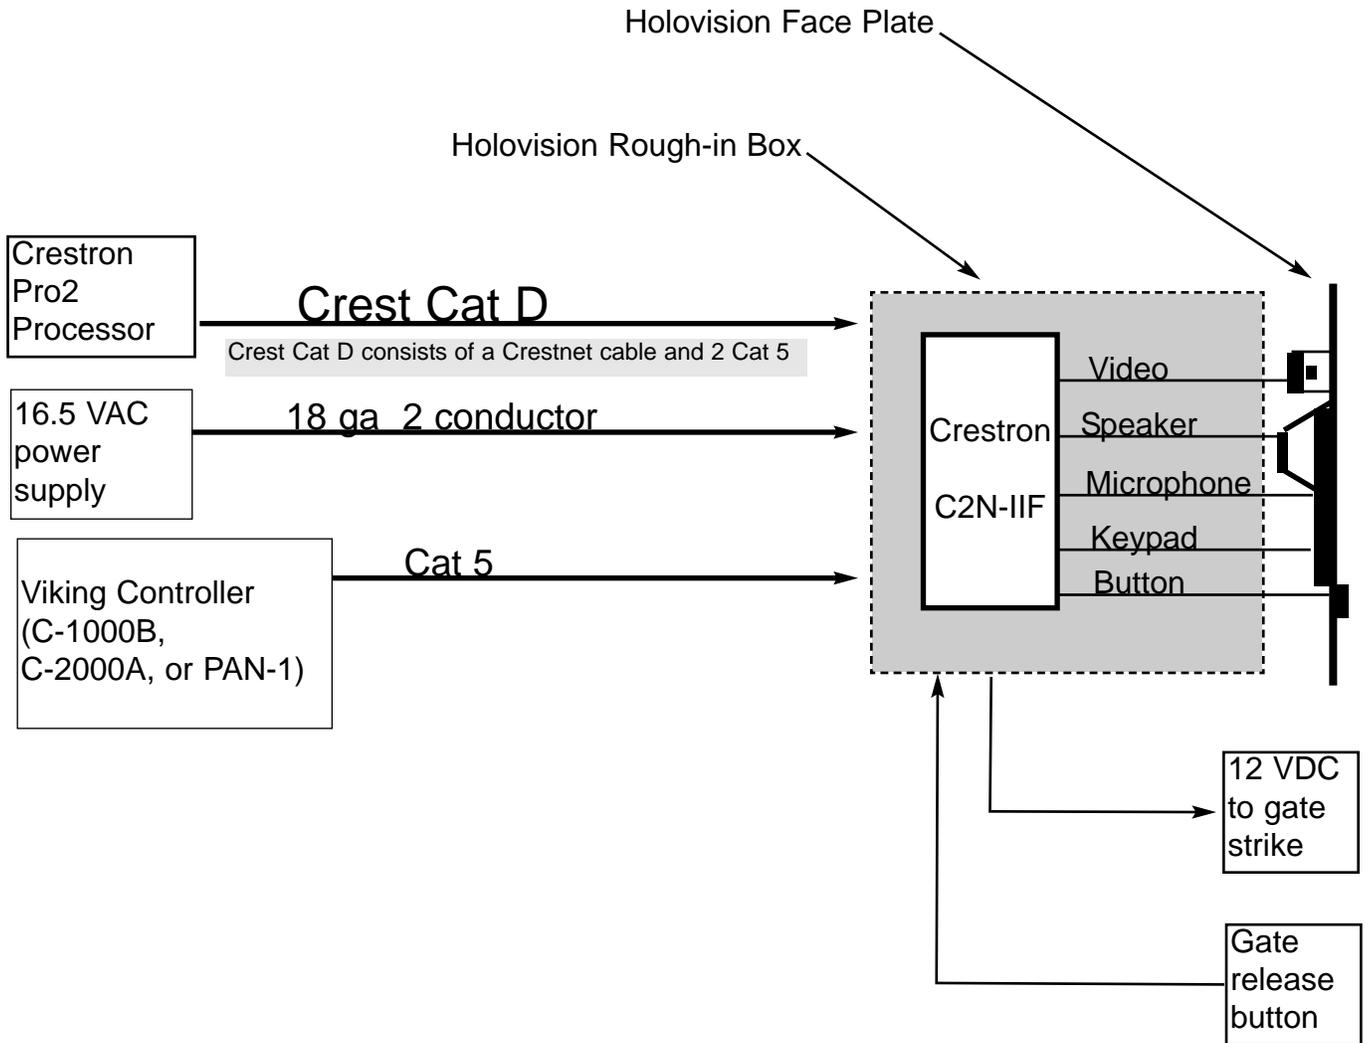


# Prewire for Models 602 and 702

For the following units: 602-CR-CR/VIK and 702-CR-CR/VIK

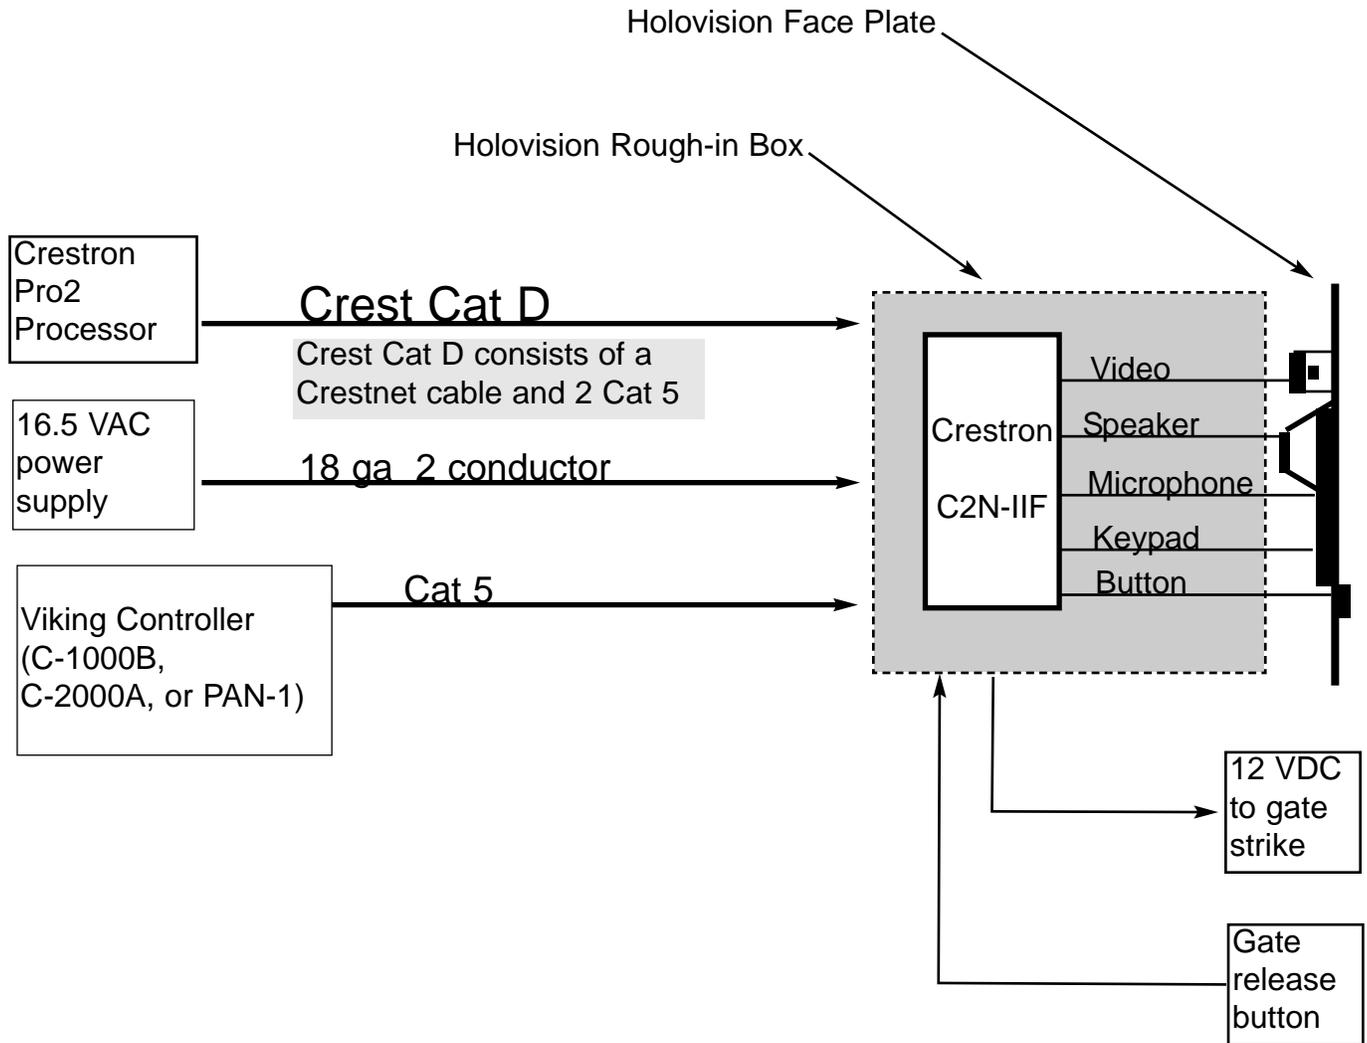

# Prewire for Models 602 and 702

For the following units: 602-W-CR/VIK and 702-W-CR/VIK

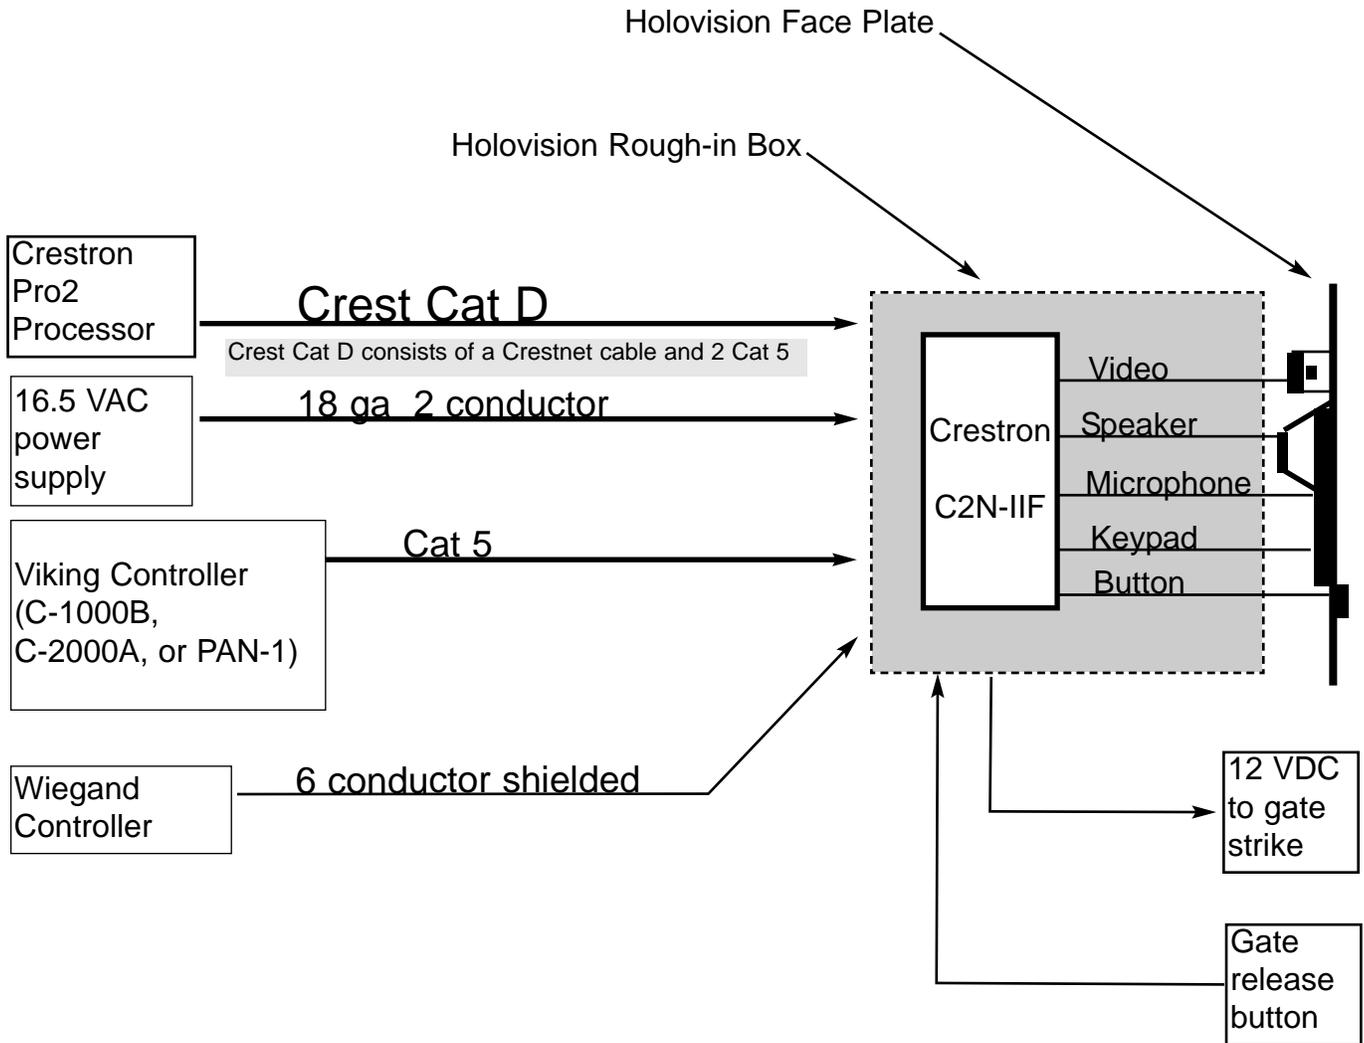

## Wiegand Keypads:

### Cable Distance


Wiegand or Clock-and-Data interface: 500 feet

### Recommended cable

Alpha 1295, Belden 5503FE 5 conductor, 22 AWG stranded with overall shield or equivalent

# Prewire for Models 602 and 702

For the following units: 602-A-CR/VIK and 702-A-CR/VIK

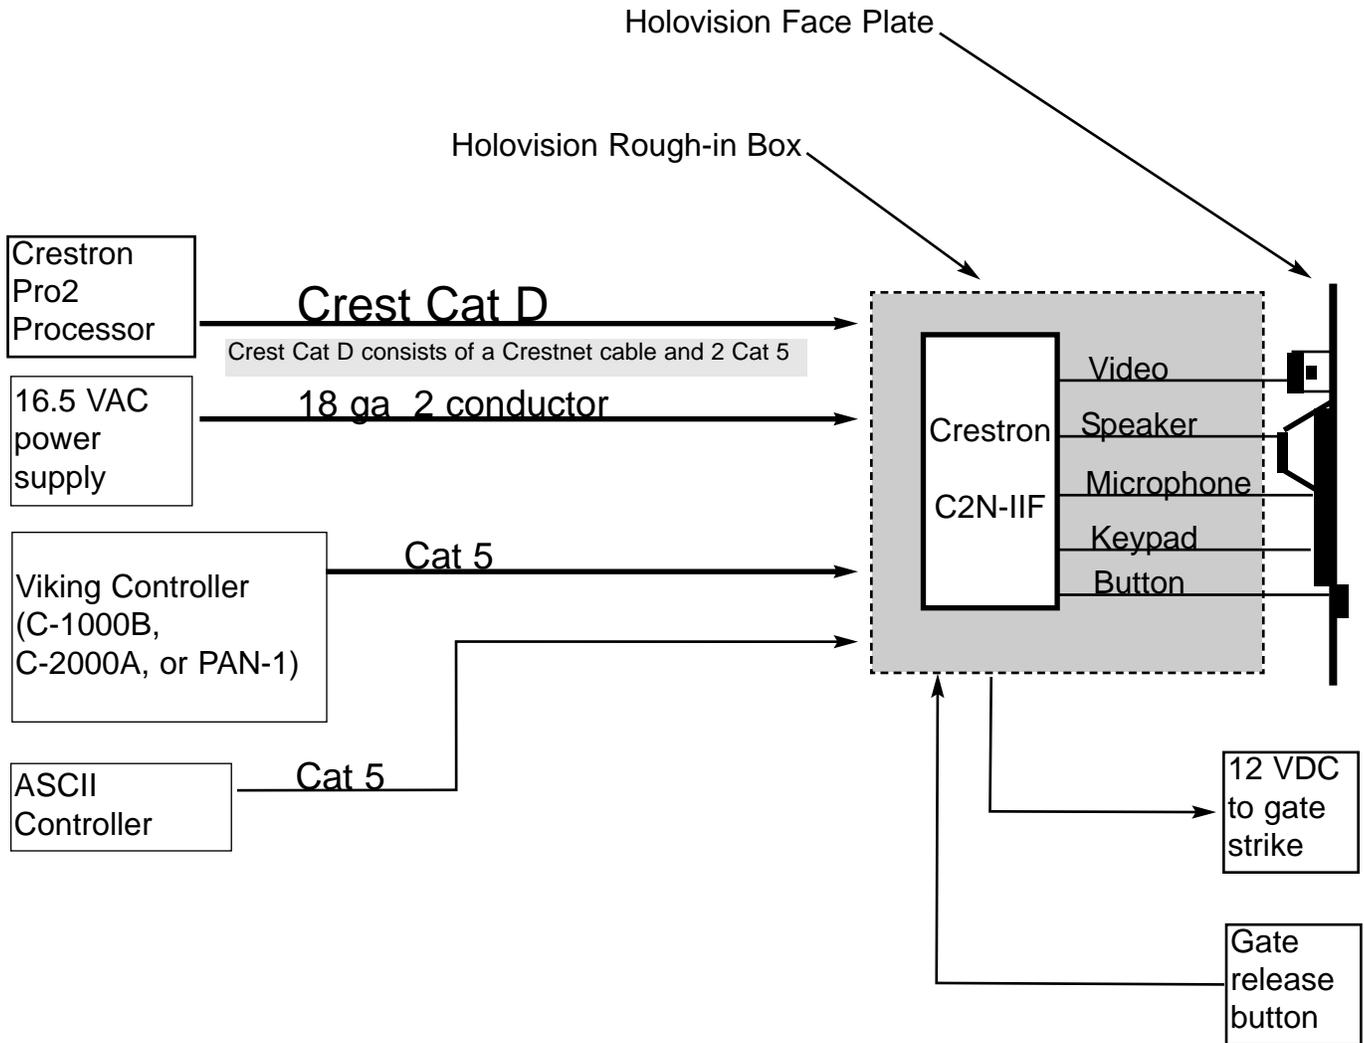

## ASCII Keypads:

### Cable Distance

ASCII controller: 500 feet

### Recommended cable

Cat 5, Cat 6

# Door Station Rough-in

---

Model 702





58"



NOTE: All dimensions given are relative to "finished" surface, not rough grade.

# Installation Details - 300 and 600 Series

---

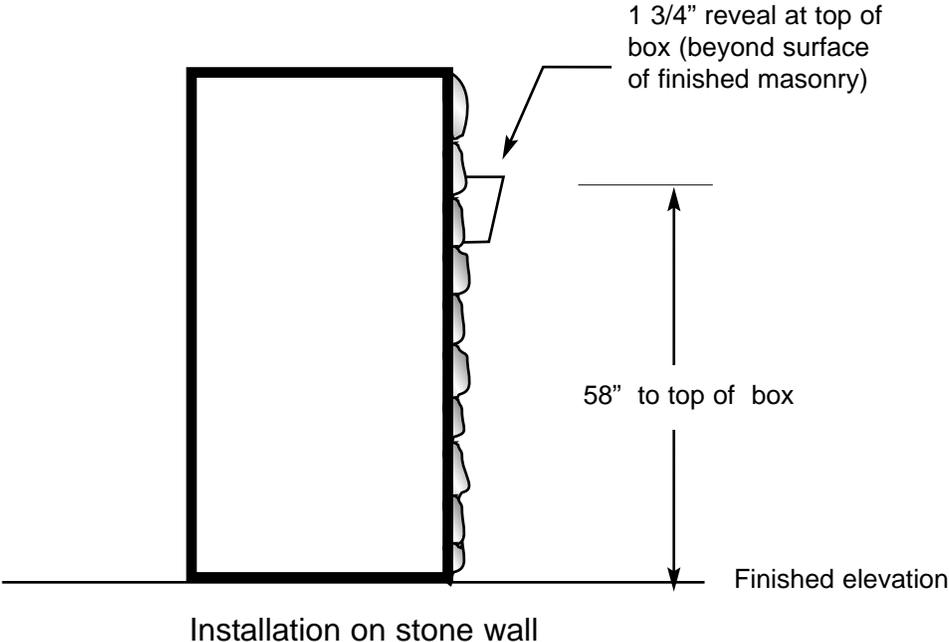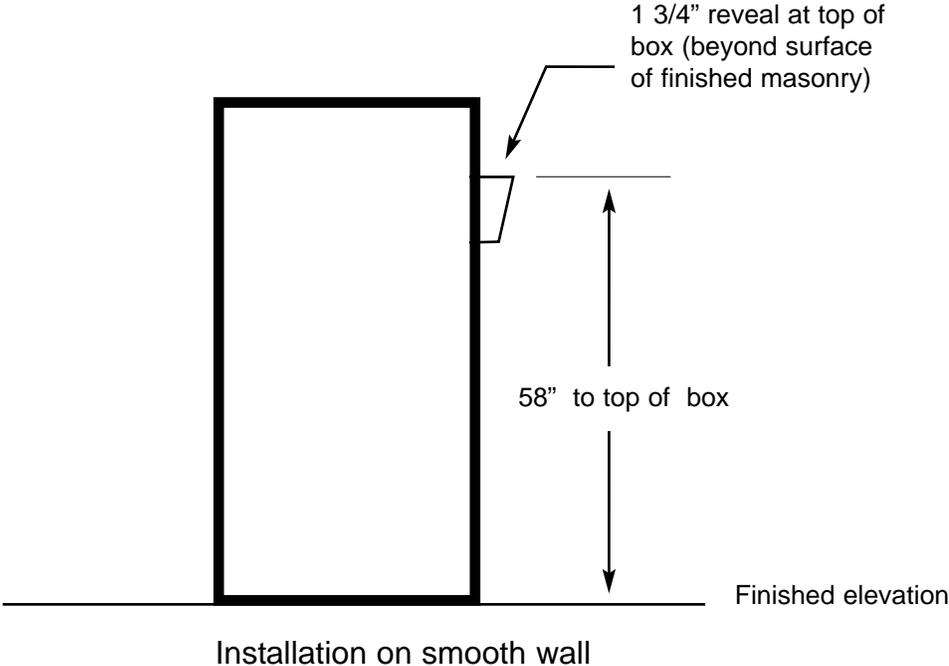

# Installation Details - 2 Piece Gooseneck

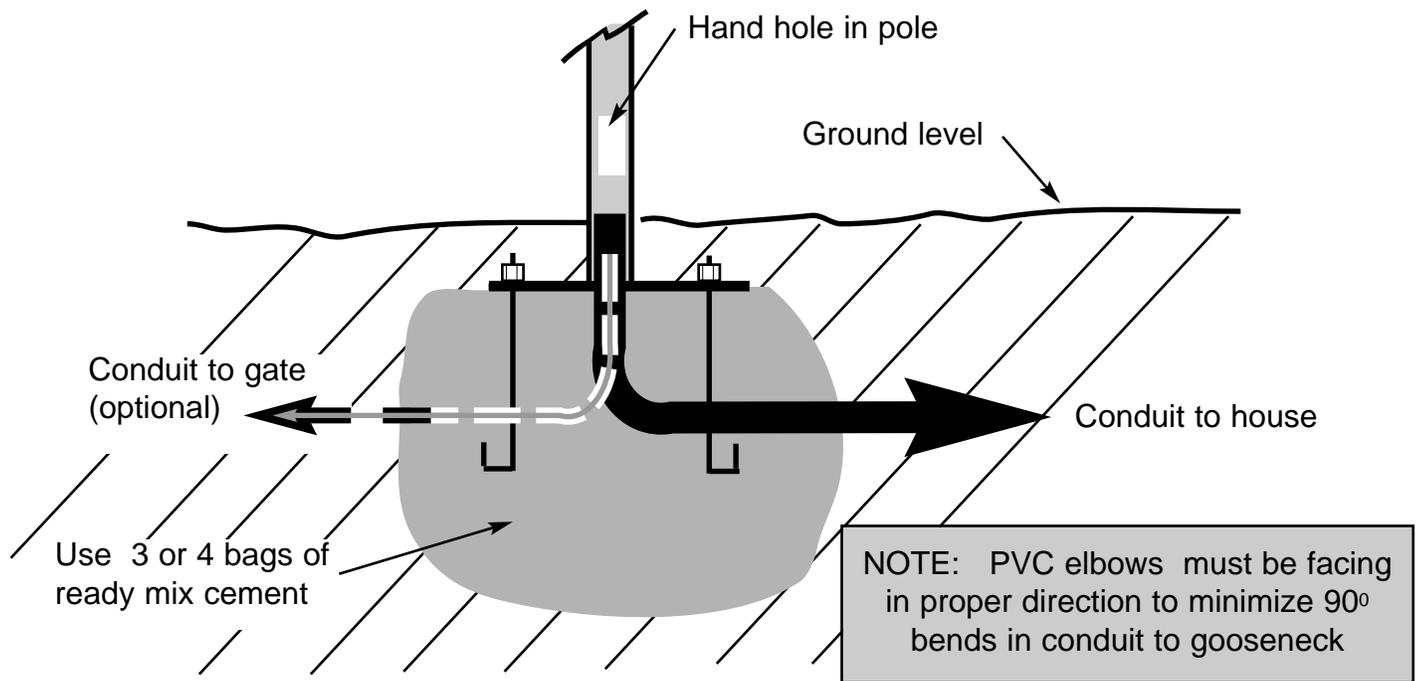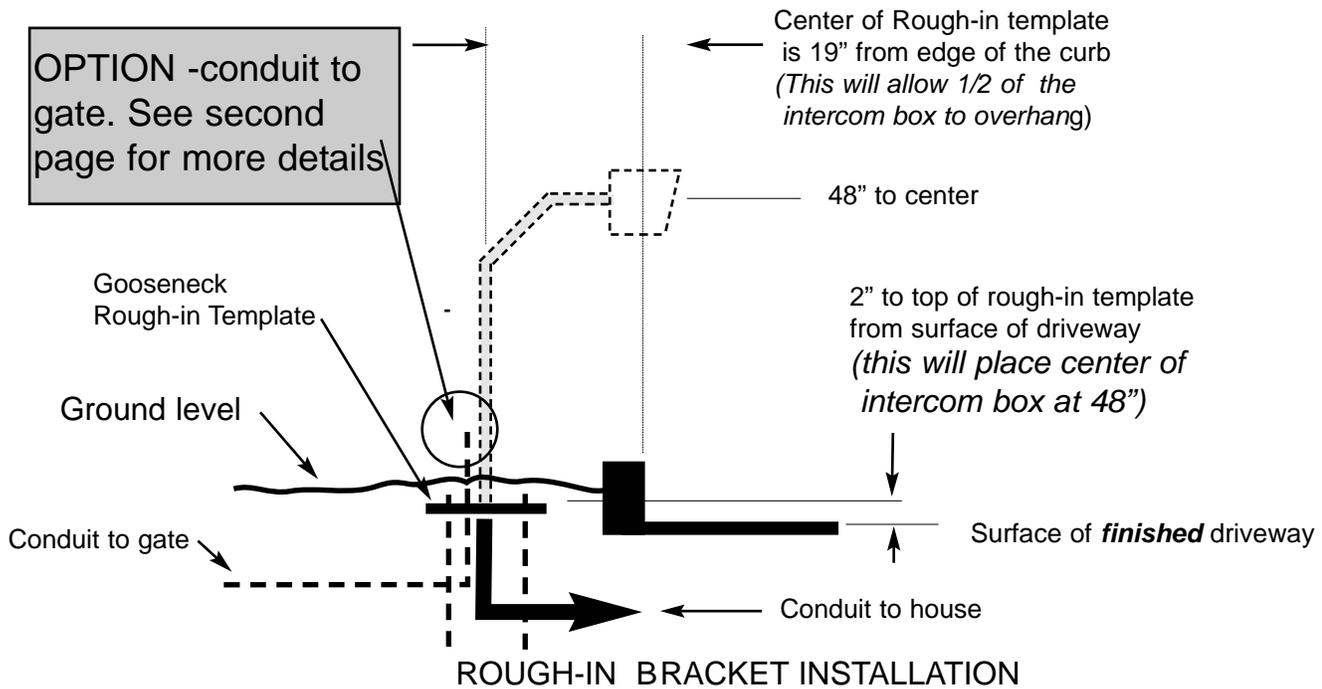

**DETAIL OF ATTACHMENT OF POLE ONTO BASE**

# Installation Details - 2 Piece Gooseneck

Optional application with 2 conduits

