


MODEL 1041 ENTRY SYSTEM for RING ELITE

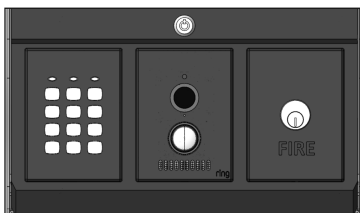

MODEL 1041-Ring

- Designed to fit existing Doorking 1812 boxes

- Aluminum (1/4") intercom unit for Ring Elite:

Left hand module is keypad

Center modules Ring Elite

OPTION:

Right hand module either blank, or set up for Knox #3501 Fire Access Switch

If the Knox version is selected, the word "**FIRE**" is engraved into the plate

Knox switch is not included.

- Specify keypad type desired: Stand-alone 12 button **1041-S12**
26 Bit Wiegand output **1041-W**

Features:

- Built-in microphone and speakers
- Live view on-demand audio and video
- Motion-Activated Alerts
- Infrared night vision
- iOS, Android, Mac and Windows 10 compatible
- Hardwired with Power over Ethernet (PoE)
- 2-way audio with noise cancellation
- 160° horizontal and 90° vertical field of view
- Works with Alexa, Echo and Show devices
- Operating Conditions: -5°F to 120°F (-20.5°C to 48.5°C), Weather Resistant
- Tamper switch output can be connected to alarm system
- S-12 keypad is standard with 1 relay. 2nd and 3rd relays are optional
- Face plate dimensions: 6" x 9.5" (h w)
- Back box dimensions: 6.125" x 10" x 5.5" (h w d) 9330 (black) or 9331 (white). (Back box must be ordered separately)

Unique to Ring Elite X Dealers:

- 3 Year Limited Warranty
- Lifetime Cloud Video Recording

MODEL 1041-X-Ring - Includes **Ring Elite Video Doorbell**, and
Ring Remote Access Control Pro. See below for Ring Remote Access Control Pro

NOTE: The "X" in the part numbers above is to specify the keypad type.

Ring Remote Access Control Pro Features

- Sold as a bundle with Ring Intercom solution
- Smart access device that works with an existing electrical access control system that can be triggered via relay to grant access through your security gate
- Works with the Key by Amazon app or Ring App
- The Ring Access Controller Pro makes it easy for you to remotely unlock your gate to grant access to friends or Amazon delivery associates to deliver eligible packages
- Requires professional installation near a power outlet and your remote access panel
- You can also turn on the Key for Gate delivery service to allow Amazon delivery agents one-time access to your security gate in order to drop off packages in a secure location.

STANDARD FINISHES: brushed bronze finish, brushed aluminum finish, black powdercoat.